


# Product Specification of Granite Paving

Manufactured using natural granite aggregate and shot blasted to expose the natural sparkling granite. Granite will enhance the beauty of your property while being durable and maintainable.

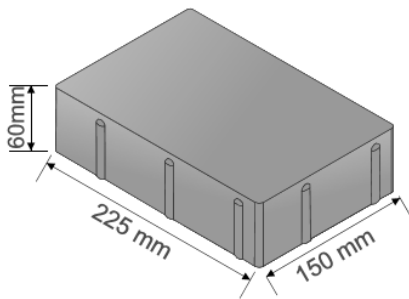

**Thickness:** 60mm

**Use:** Driveways & Footpaths—  
domestic & commercial


**Laying Patterns:** Stretcher bond

**Spacing Nibs:** 1.5mm nibs

**Finishes & Colour:** Textured Granite aggregate finish with 3 colour options



Silver



Black



Yellow

Product	Brick Size mm	Colours	No. per Sq.m	No. per Pack	M <sup>2</sup> per Slice	Pack Size Sq.m	Pack Weight Kgs	No. Packs per Arctic	Sq.m per Arctic Load
60mm	225 X 150 X 60	Silver, Black, Yellow	29.63	250	1.68	8.43	1160	24	202.5

**Raw Materials:** Granite, Sand, Stone, Cement, Pigment

**Manufacturing Process:** Hydraulically Pressed

**Manufacturing Standards:** Manufactured to BS EN 1338

**Quality Systems:** All products undergo testing to standards of EN ISO 9001 and are covered by CE certification.

**Application:** Please refer to Health & Safety data sheets

**Installation:** Installed to BS 7533-3

**Performance Criteria:** Strength: >3.6MPa or 250N/mm

Barleystone Paving, Taghart  
South, Shercock,  
Co. Cavan, A81 D667