

Product Specification of Kingspave Cobble

Capture the elegance of nostalgic old world charm, the Kingspave Cobble paving collection has a gently distressed surface to achieve that natural weathered appearance.

Feature: 3 Size Mix. Each pack contains the 3:2:1 ratio eliminating the need for multipacks. Each slice within a pack contains 1sqm so no need to split packs.

Thickness: 60mm

Use: Driveways & Footpaths— domestic & commercial

Laying Patterns: 3 Size Mix layout

Spacing Nibs: 1.5mm nibs

Finishes & Colour: Tumbled finish with 10 colour options

Kerbs: Complimentary kerb range available



Birch



Chestnut



Damson



Juniper



Maple



Mulberry



Oak



Silver Grey



Sycamore



Walnut

Product	Brick Size mm	Colours	No. per Sq.m	No. per Pack	M ² per Slice	Pack Size Sq.m	Pack Weight Kgs	No. Packs per Arctic	Sq.m per Arctic Load
60mm Large	225 X 150 X 60	Damson, Birch	29.63	250	1.68	8.43	1160	24	202.5
60mm 3 Size Mix	225 X 150 X 60 150 X 150 X 60 112.5 X 150 X 60	Available in all Colours	17	136	1	8	1100	25	200
			14	112					
			6	48					

Raw Materials: Sand, Stone, Cement, Pigment

Manufacturing Process: Hydraulically Pressed


Manufacturing Standards: Manufactured to BS EN 1338

Quality Systems: All products undergo testing to standards of EN ISO 9001 and are covered by CE certification.

Application: Please refer to Health & Safety data sheets

Installation: Installed to BS 7533-3

Performance Criteria: Strength:>3.6MPa or 250N/mm

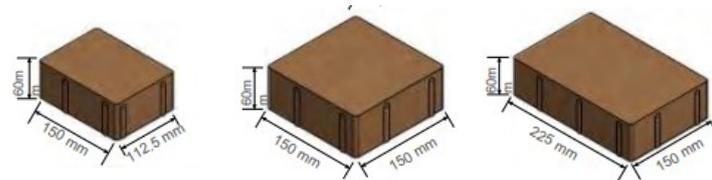

Barleystone Paving, Taghart
South, Shercock,
Co. Cavan, A81 D667