

P-B PVC

P-B PVC plaster drip profile for clean plaster finishing and drip edge forming

Material:

- PVC resistant to alkali environment and UV radiation



Features:

- bottom plaster finishing with formation of drip edge
- individual profile types are adapted to various plaster thicknesses from 6 to 14 mm
- connecting pin for elimination of plaster cracking at bead joints (only for product variants 10 and 14 mm)

Instruction for use:

Make the bead stable on the substrate by applying it onto an adhesive mortar or another suitable material and level with spirit level. Apply the plaster and finish it at the bead edge.

Packaging, storage and transport:


Packed in paper boxes. Store in a dry roofed place. Transport in horizontal position.

Certifications and marks:

The product is not subject to any harmonized standard.

Technical data:

Bead length [mm]	2500
Variants according to plaster thicknesses [mm] - X	6 – without connecting peg 10, 14
Main wing width [mm]	47

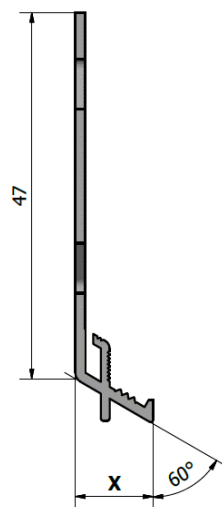

Issued on 17 October 2019.

This update invalidates all previous versions of this technical data sheet. The specified product dimensions are nominal and may range within the permitted manufacturing tolerances.