



Never compromise on quality!



# WATERSEAL

## Premium Masonry Waterproofer



BUILDERS COMPLETE RANGE

### Description:

*A premium waterseal designed to repel water from masonry work which allows walls to breathe, reducing the risk of damage caused by water and frost.*

### Benefits:

- ◆ *Protects brickwork, cement and concrete.*
- ◆ *Low hazard - no vapours.*
- ◆ *Breathable formulation.*
- ◆ *Does not affect the appearance of building.*

### Uses

Bond It **WATERSEAL** is used as a masonry waterproofer suitable for use on brick, stone and concrete. It protects against water and frost, providing a breathable coating which does not change the physical appearance of a building.

A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reducing heating costs as energy is not wasted in drying out wet walls.

### Preparation

Ensure all surfaces are free from dirt, mosses and lichens. For stubborn green growth and lichens use Bond It **MOULD STOP** or **PATIO BLASTER**. Allow a minimum of 24 hours for fresh pointing to dry before application. Ensure surfaces are clean and dry.

### Application

Apply using a low pressure spray (non-atomising) or brush at a rate of 3m<sup>2</sup> per litre for porous stone and 5m<sup>2</sup> per litre for hard brick, allowing 6 hours to dry before applying a second coat. Always apply with a smooth action starting at the top and working your way down the wall. Care should be taken not to splash or mist cars, windows, painted surfaces, plants and ponds. Two coats are recommended for best results, however more coats can be applied.

### Limitations

Bond It **WATERSEAL** is only suitable for use on unpainted brick, stone or render. It can not be overpainted. If product has become thick and gel-like do not use (water contamination has occurred).



### Cleaning of Tools

Clean tools with white spirit.

### Coverage

3 - 5m<sup>2</sup> per litre depending on porosity of substrate.

### Container Size

5L metal tins.

### Colour

Clear liquid.

### Shelf Life

12 months from date of manufacture when stored in sealed tins.

### Storage Conditions

Store in cool, dry conditions between +5 and +30°C. Protect from frost, high temperature and direct sunlight.

### Disposal of Containers

Do not leave empty containers where residue could be harmful to children, animals or the environment. Remove any containers to a central disposal point in accordance with local regulations.

### Health & Safety


**Contains white spirit.**

Please refer to separate material safety data sheet for full handling, use and storage instructions. Keep out of reach of children. It is the users responsibility to determine suitability for use. If in doubt contact our Technical Department for advice.

**Note: this information is for general guidance only, since site conditions and labour are beyond our control. It is recommended that users make their own tests to determine suitability.**

## Specification Summary

Flammability	Flammable
Chemical Composition	Polyoxysterate in white spirit
Appearance	Colourless liquid
Coverage	3-5m <sup>2</sup> per litre dependant on substrate
UN Class	1300 Turpentine Substitute
UFI	UP50-907T-100A-2QTM

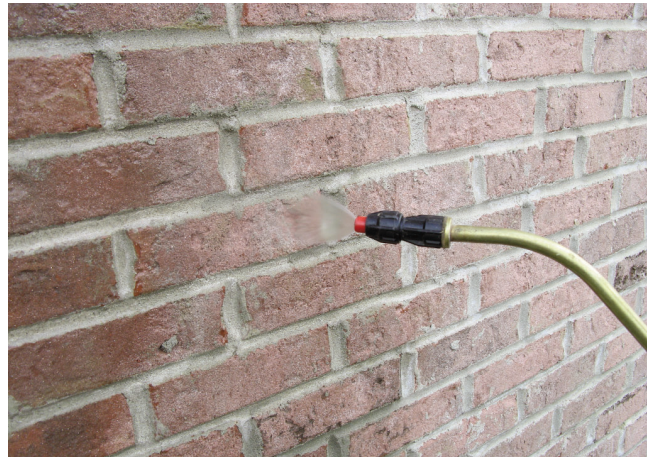

## Product Details:

<b>Colour:</b>	Clear	Clear
<b>Code:</b>	BDH050	BDH051
<b>Size:</b>	5L	25L
<b>Barcode:</b>	5060021364579	5060021364579



Part of the Bond It Builders Complete Range

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties rights and, if necessary clarifying the position. Recommendations for use do not constitute a warranty, either expressed or implied, of the fitness or suitability of the products for a particular purpose.



Certificate Number:  
6152  
ISO 9001; ISO 14001;  
ISO 45001



**BOND IT**  
Head Office: Unit G16 River Bank Way, Lowfields Business Park,  
Elland, West Yorkshire HX5 9DN.  
Telephone: +44 (0)1422 315300 Fax +44 (0)1422 315310  
Email: salesuk@bonditgroup.com Website: www.bonditgroup.com



**V3 02/03/16**  
Supersedes: V3 02/03/16