

Dimensions	Width: 168mm Depth: 23mm
Lengths available	2.4 Metres
Design / finish	Low Risk of Slip Groove
Colour options	Ebony, Grey, Teak & Redwood
Installation options	Concealed clip system & traditional screw system
Other	Colour matching screws available

Step Board




Test	Method	Result
Slip resistance	BS 7976-2: 2002 + A1:2013	Dry value: 52 Wet value: 37
Swelling	EN 15534-4:2014 Section 4.5.5	0.5% thickness 0.1% width 0.1% length
Water absorption	EN 15534-1:2014 Section 8.3.1	0.5%
Resistance to indentation	EN 15534-4:2014 Section 4.5.7	Brindell hardness: 104 MPa Rate of elastic recovery: 74%
Impact resistance	EN 15534-1:2014 Section 7.1.1	Charpy impact strength: 4.4 kJ/m ²
Tensile strength	ASTM D638-14	Length direction: 23.2 MPa Width direction: 14.1 MPa
Linear thermal expansion	ASTM D696-16	Mean value: 43.8 x10 ⁻⁶ /°C
Bending	ASTM D7031-11 Section 5.5 ASTM D4761-13 Section 7	MOR: 39.3 MPa MOE: 4168 MPa
Resistance to artificial weathering UV 2000 Hours	ASTM D7032-17 Section 4.6 ASTM G154-16 Cycle 1	Exposure time 2000 Hrs Grey scale: 3-4
Flexural test	ASTM D7032-17 Sec 4.4 ASTM D6109-10	MOR: 37.9 MPa MOE: 4348 MPa
Freeze / Thaw resistance	ASTM D7032-17 Section 4.7 ASTM D6109-10	MOR: 36.7 MPa Change -3.2% MOE: 4386 MPa Change 0.9%
Density	ASTM D792.13 Method A	Mean value: 1.317 g/cm ³

Full installation instructions available at www.builddeck.co.uk/resources.

60mm Dimensions	2400 x 60 x 10mm
100mm Dimensions	3600 x 100 x 10mm
Design / finish	Grooved & Smooth
Colour options	Ebony, Grey, Teak & Redwood
Installation options	Colour match screw system
Other	Designed for finishing borders

Fascia Trim

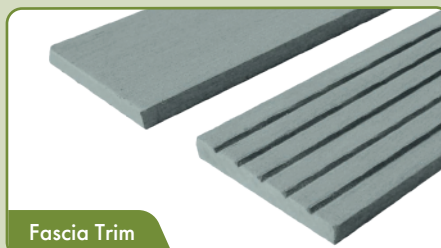

Test	Method	Result
Swelling	EN 15534-4:2014 Section 4.5.5	0.5% thickness 0.1% width 0.1% length
Water absorption	EN 15534-1:2014 Section 8.3.1	0.5%
Resistance to artificial weathering UV 2000 Hours	ASTM D7032-17 Section 4.6 ASTM G154-16 Cycle 1	Exposure time 2000 Hrs Grey scale: 3-4
Freeze / Thaw resistance	ASTM D7032-17 Section 4.7 ASTM D6109-10	MOR: 36.7 MPa Change -3.2% MOE: 4386 MPa Change 0.9%
Density	ASTM D792.13 Method A	Mean value: 1.317 g/cm ³

Ebony

Grey


Teak

Redwood



Fixings

M5 Screws



For more
information or
to arrange a
quotation, please call
01438 362 547
or email
info@builddeck.co.uk