


Dimensions	Width: 146mm Depth: 23mm
Lengths available	2.4 & 3.6 Metres
Design / finish	Reversible: Woodgrain & groove
Colour options	Ebony, Grey, Teak & Redwood
Installation options	Concealed clip system & traditional screw system
FSC® certification	License code: FSC-C007915
Other	Colour matching screws available



Test	Method	Result
Slip resistance	BS 7976-2: 2002 + A1:2013	Dry value: 52 Wet value: 37 <i>Groove side only</i>
Reaction to fire	EN 13501-1:2007+A1:2009	Cfl-s1
Swelling	EN 15534-4:2014 Section 4.5.5	0.5% thickness 0.1% width 0.1% length
Water absorption	EN 15534-1:2014 Section 8.3.1	0.5%
Resistance to indentation	EN 15534-4:2014 Section 4.5.7 EN 15534-4:2014 Section 4.5.7	Brindell hardness: 104 MPa Rate of elastic recovery: 74%
Impact resistance	EN 15534-1:2014 Section 7.1.1	Charpy impact strength: 4.4 kJ/m ²
Flexural Properties	EN 15523-1:2014 Section 4.5.2 EN 15534-4:2014 Annex A	3306.65 N
Bending Strength	EN 15523-1:2014 Section 4.5.2 EN 15534-4:2014 Annex A	25.69 MPa
Modulus Of Elasticity	EN 15523-1:2014 Section 4.5.2 EN 15534-4:2014 Annex A	3406.80 MPa
Resistance to artificial weathering UV 2000 Hours	ASTM D7032-17 Section 4.6 ASTM G154-16 Cycle 1	Exposure time 2000 Hrs Grey scale: 3-4
Freeze / Thaw resistance	ASTM D7032-17 Section 4.7 ASTM D6109-10	MOR: 36.7 MPa Change -3.2% MOE: 4386 MPa Change 0.9%
Density	ASTM D792.13 Method A	Mean value: 1.35g/cm ³

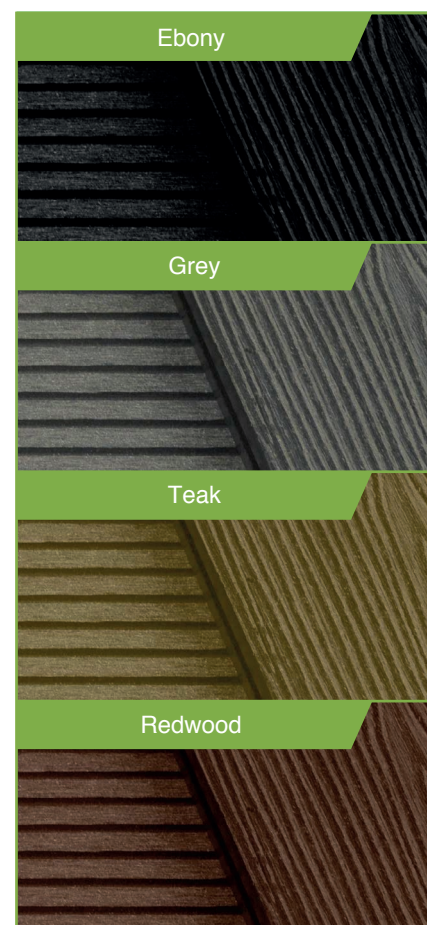

Fixings for concealed clip system			
	Starter clip 30 x 30 x 14mm Stainless steel Black		Locking clip 33 x 18 x 11mm Stainless steel Black
	Nylon clip 45 x 17 x 12mm Black		M3.9 screws & T15 Torx Stainless steel

Fixings for traditional screw system	
	Tapered Drill Bit & T20 Torx Stainless steel
	M5 Screws ■ Ebony ■ Grey ■ Teak ■ Redwood

For more information on our Vintage range or to arrange a quotation, please call
01438 362 547
 or email
info@builddeck.co.uk

Full installation instructions available at www.builddeck.co.uk/resources.